

Nouzové svítidlo

LED Escape sign luminaire; Luminaire with local battery supply for 1 hr. emergency lighting in maintained or non-maintained mode, with automatic test (auto-test) via the luminaire, optional central monitoring via DALI, display of luminaire status via status LED; wall mounted; housing made of polycarbonate, white, injection moulded; NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; luminaire easy to install. Zero maintenance thanks to LED technology; service life of 50,000 h at constant luminous flux. Plug-in terminals 2.5 mm², through-wiring possible for 1.5 mm²; total power: 6.6 W, protection class: IP42, class of protection: SC2; Impact strength: IK03; non-maintained and maintained mode possible, Maintained and non-maintained mode: +5°C to +30°C; power supply: 220 - 240 V AC, 50 / 60 Hz, ; dimensions of luminaire including escape sign: 227 x 130 x 27 mm; weight: 0.49 kg; Luminaire wired with halogen-free leads; Luminaire with D symbol (for use in environments in which no unusual accumulation of dust is expected)


Příslušenství: PURESIGN 150 MSW/MRW SP-1L ERI

22168701

Escape sign for PURESIGN 150 AW/EW ERI with aluminium surround in powder-coated silver-look finish, designed for fitting without tools onto the PURESIGN 150 ERI housing. Escape-route illumination (ERI) function provided by two additional high power LEDs and asymmetric lenses with 360° adjustment, latched in 90° positions. Integral low power LEDs provide uniform backlighting of pictogram with a luminance of > 500 cd/m² in the white region; pictogram applied by digital printing to the transparent polycarbonate panel. Arrow: left arrow. Recognition distance: EN-30 m; dimensions: 310 x 20 x 160 mm, weight: 0.72 kg.




ZS_ONL_F_PUR_150_AW_EW_RZ-L_ERI.jpg

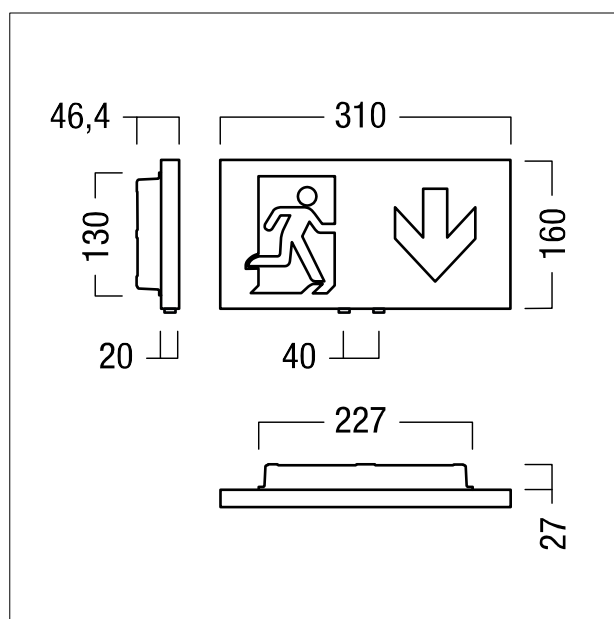

ZS_ONL_M_PURE_150_AW_Nx_ERI_incl_Rx.wmf

Křivka svítivosti

STD – standard

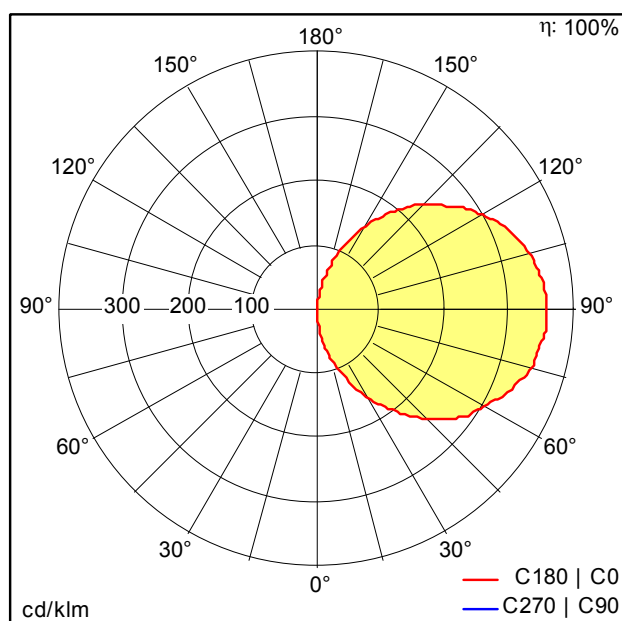

- Světelný zdroj: LED
- Světelný tok*: 60 lm
- Světelný výkon svítidel*: 9 lm/W
- Index podání barev - CRI min.: 70
- Předřadník: 1 x 89800524 EM TR EM powerLED NTx 102 DIM 5W ZUM
- Barevná tolerance v místě (MacAdam)*: 4
- Střední dimenzovaná životnost*: 50000h L70 při/u 25°C
- Příkon svítidla*: 6,6 W Výkonový faktor = 0,8
- Vyměření doby provozu: 1 h

Viz také doplňkové informace na následující stránce
D31337AA_PURESIGN_150_E1D_SP-1x_ERI.Idt, ,

PURESIGN 150 P, nástěnné



ZUMTOBEL

PURESIGN 150 P MSW E1D ERI WH

42186028

Nouzové svítidlo